

BREAKER TYPE

CHISEL TYPE



TOP TYPE (PLUS) TOP TYPE BOX TYPE SIDE TYPE




X - TYPE CHISEL FLAT CHISEL

MAINTENANCE

SESUAIKAN PRESSURE PADA EXCAVATOR | PASTIKAN TEKANAN NITROGEN
 PERIKSA BAUT | PERIKSA KEBOCORAN SELANG | GEMUK SETIAP 2 JAM
 POSISI MEMBOBOK HARUS BENAR | PENGUKURAN RUTIN FRONT BUSHING

DIAGRAM

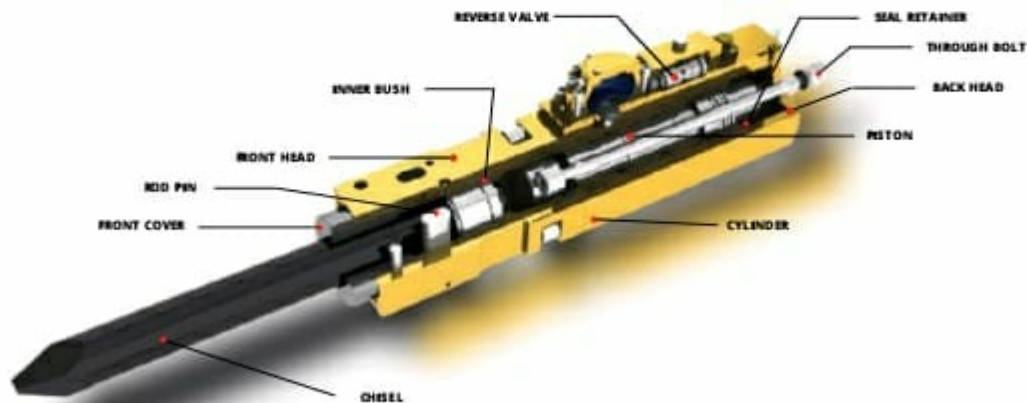

SPECIFICATION

HARTEC	HT45	HT53	HT68	HT75	HT85	HT140	HT155	HT165
Suitable Excavator (T)	1 - 2	3 - 4	4 - 7	7 - 9	10 - 14	18 - 24	28 - 35	38 - 48
Operating Weight (Kg)	130	200	400	500	1000	2000	2900	3200
Required Oil Flow (L/Min)	20 - 40	25 - 50	25 - 45	30 - 45	80 - 110	120 - 180	180 - 240	220 - 260
Operating Pressure (bar)	80 - 110	90 - 120	110 - 140	110 - 160	150 - 170	160 - 180	160 - 180	180 - 200
Impact Rate (bpm)	700 - 1200	600 - 1100	500 - 900	500 - 800	400 - 750	500 - 700	380 - 500	200 - 350
Chisel Diameter (mm)	45	53	68	75	85	140	155	165